

# WHAT IS SURESENSE+?

The **SureSense+** (*SureSense Plus*) is an advanced wall-mounted foam controller, which connects to up to three sensors mounted in a single, or multiple, process vessel(s). It allows for the accurate control of aqueous foam by sensing and differentiating between foam and liquid contact. The controller can activate a dosing pump to either keep the foam at a fixed level or to reduce the foam height as required.

Hycontrol's unique **IMA sensing® technology** ensures the system will operate correctly even if the attached sensors become severely fouled. The controller is pre-programmed with a number of useful factory application settings/recipes to aid set-up, and offers both **proportional and delay-and-shot algorithms** for anti-foam dosing when controlling a pump or valve. To discriminate between foam and splashing or other spurious triggers, the controller has an **adjustable response time**. Although the controller can be used for stand-alone control, other control actions such as vacuum valves or gas control can be interfaced. **Thresholds** for both foam and liquid level can be adjusted for very light foams. **ATEX barriers for hazardous areas** are also available.

## FEATURES AND BENEFITS


- ◆ **Clear display with easy menus for simple programming and use**
- ◆ **Multiple relay outputs for improved control**
- ◆ **Connect up to three foam probes to one controller - reduce costs**
- ◆ **Liquid detection capability to provide greater process control**
- ◆ **Proportional dosing algorithm reduces unnecessary anti-foam use**
- ◆ **Record anti-foam use to alert when approaching low level**
- ◆ **Directly control pumps or valves, or connect to external controller**
- ◆ **Probes pressure resistant to 10 bar, temperature to 150°C**
- ◆ **Wide selection of foam probe lengths, connections and materials**
- ◆ **Immunity to fouling with unique IMA sensing® = total probe reliability**



## HOW IT WORKS: FOULING IMMUNITY WITH IMA SENSING®

Fouling and product coating of measuring probes is common in many foaming applications. High sensitivity to detect light foam products is an essential requirement, but it is equally important to differentiate between sensor coating and the product rising inside the tank. This is where Hycontrol IMA (Intelligent Multi-Action) sensing® is truly unique, as it will operate with total efficiency even when the probe becomes fouled with residual product.

IMA sensing® technology incorporates a special guard electrode (shown in **blue**, *diagram right*), which disrupts the signal produced by the accumulated fouling. This would otherwise have a desensitising effect on the probe. The main foam sensor (in **red**) is then able to ignore product build-up, regardless of thickness, and to monitor only foam within the process. Even with dense or sticky fouling on the sensor, the probe continues to give accurate and reliable foam control.

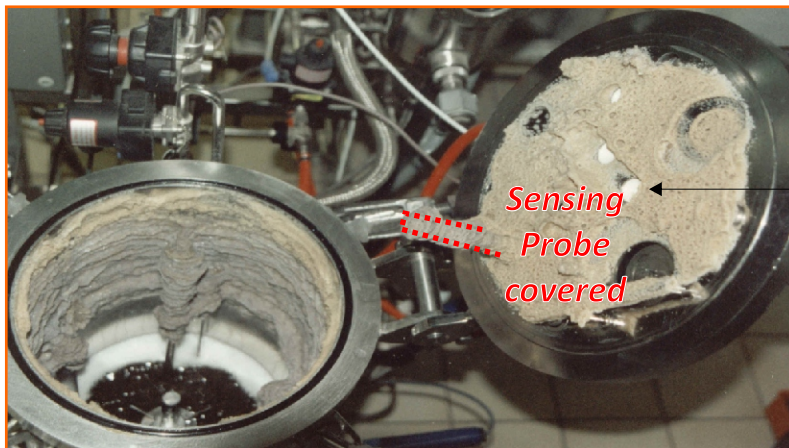

A small batch reactor still operating efficiently with the probe totally covered in product build-up


IMA principle displaying the guard probe and the measuring probe



# SURESENSE+ WALL-MOUNTED CONTROLLER

## CONTROL MULTIPLE TANKS WITH ONE CONTROLLER

SureSense+ features a new multi-probe capability, allowing for **fully independent monitoring and dosing control of up to three tanks from a single controller**. This offers multi-tank users a significant cost saving, as well as simplifying programming and creating flexibility for different set-ups.

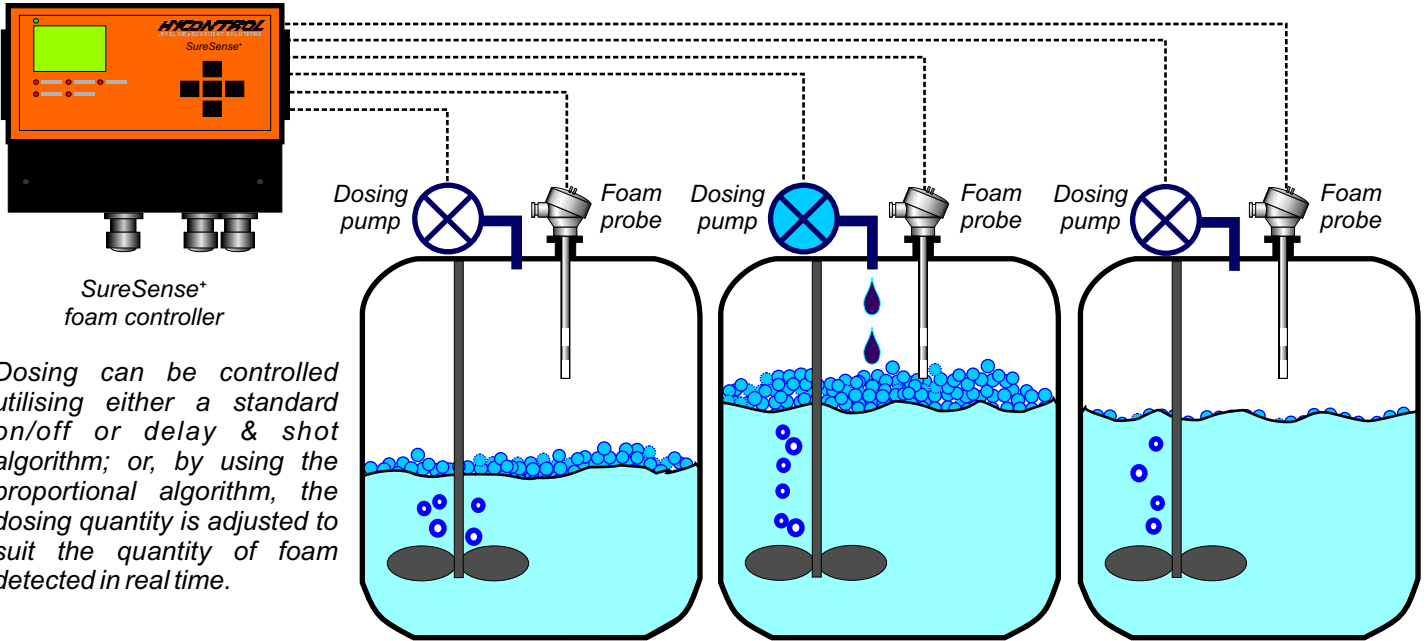


Dosing can be controlled utilising either a standard on/off or delay & shot algorithm; or, by using the proportional algorithm, the dosing quantity is adjusted to suit the quantity of foam detected in real time.

## IMPROVED LCD INTERFACE

The SureSense+ control unit offers a user interface that is significantly improved over previous versions, with a clear, readable LCD screen and easy-to-use membrane keys.

Programming is conducted through a straightforward menu system, with a selection of information displays depending upon requirements. Foam information can be displayed as a percentage detected or as electrical current resistance. Typical 'recipe' settings for most common industrial applications are available from a pre-set options table.

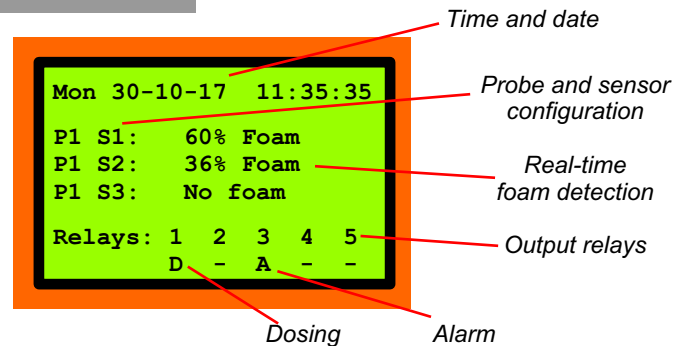

## ELECTRICAL & ENCLOSURE DATA

### Power supply Output

12 – 30 vDC 0.5A (250 mA fast-acting TR5 fuse – Littlefuse 37002500430)  
 Relay 1 – Dosing / Alarm – volt-free change over contacts 250 vAC, 30 vDC 8A  
 Relays 2 & 3 – Dosing / Alarm – volt-free normally open contact 250 vAC, 30 vDC 5A  
 Relays 4 & 5 – Alarm – volt-free normally open contact 250 vAC, 30 vDC 5A

### Indicators

Analogue 4 – 20 mA current loop  
 Power indicator – Red: always on  
 Relay 1 – 5 – Red: On when relay in alarm state

### Adjustments

Foam sensitivity 0 – 100%      Fouling sensitivity 0 – 100%      Liquid sensitivity 0 – 100%  
 Dosing settings      Relay / Alarm settings

### Fouling immunity

200:1 foam to fouling

### Hysteresis

5% between trigger and reset

### IP rating

IP65 wall mounting, polycarbonate

### Dimensions

235mm x 185mm x 119mm (L x W x H)

### Connections


5 x M20 entry ports  
 1 x M16

# PURPOSE-DESIGNED FOAM SENSORS

Hycontrol's SureSense<sup>+</sup> sensor probes, when used in conjunction with the SureSense<sup>+</sup> foam controller unit, provide **efficient and cost-effective foam control** across a wide range of water-based process applications.


Each stainless steel sensor can be customised to suit the requirements of your process. Different heads and process fittings are available, with standard insertion lengths of **up to 3 metres** (for a 20 mm diameter probe). **Probes can be supplied with up to three separate alarm points as required.** This flexibility makes Hycontrol the first choice for the widest range of foam applications.

The sensors are **hygienic and steam sterilisable**, and by utilising Hycontrol's patented IMA Sensing<sup>®</sup> technology they are able to discriminate between the residual build-up of product along the sensor and the foam created during the process. Thus, the **SureSense<sup>+</sup> sensors are able to continue to efficiently monitor foam levels regardless of how fouled the sensor may become.**

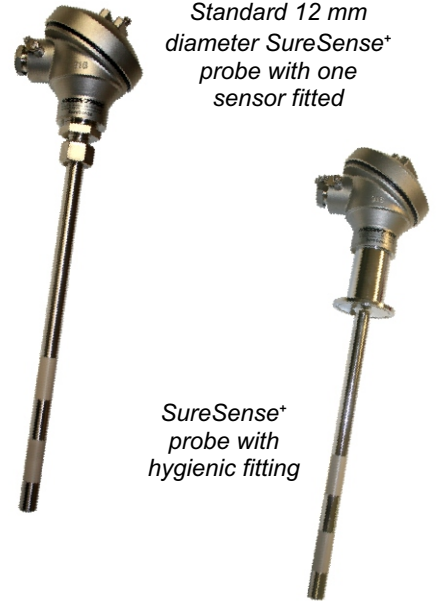

Standard 12 mm diameter SureSense<sup>+</sup> probe with one sensor fitted

SureSense<sup>+</sup> probe with hygienic fitting

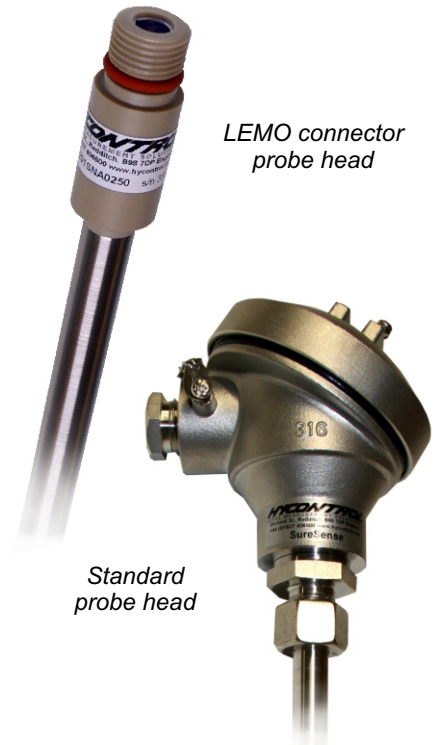

LEMO connector probe head

Standard probe head

## HOUSING & PROCESS FITTING

The standard head design for the SureSense<sup>+</sup> sensor is available in aluminium or Stainless Steel. A laboratory sensor fitted with a LEMO connector is also available (please contact Hycontrol to discuss this option).

To meet a wide range of applications, our sensors are available with an equally wide range of process fittings. If the level of foam is always variable then sensors can be made adjustable, or if the optimum level is known then the sensor can be set at a fixed length.

## MECHANICAL & ELECTRICAL DATA


Please refer to order codes chart for full list of options.

<b>Termination</b>	Heavy duty die-cast alloy industrial termination lead IP 66 Pluggable screw terminal block
<b>Cable Entry</b>	20mm ISO Conduit entry
<b>Cable</b>	Lapp Unitronic CY PiDY (TP) cable (100 m / 328 ft max. length)
<b>Temperature</b>	Max. continuous operating temperature 150°C / 302°F Peak temperature 170°C / 338°F
<b>Pressure</b>	10 bar / 145 psi (higher pressure available to special order)


## SENSOR PROBE MULTI-POINT OPTIONS

A SureSense<sup>+</sup> probe consists of between one and three sensors. The probes should be ordered with the controller and are built to the required specification. *Pictured below are examples of different probe sensor set-ups.*

SureSense<sup>+</sup> single probe construction

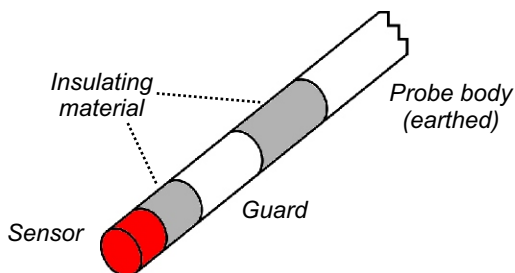

SureSense<sup>+</sup> probe with two sensors fitted

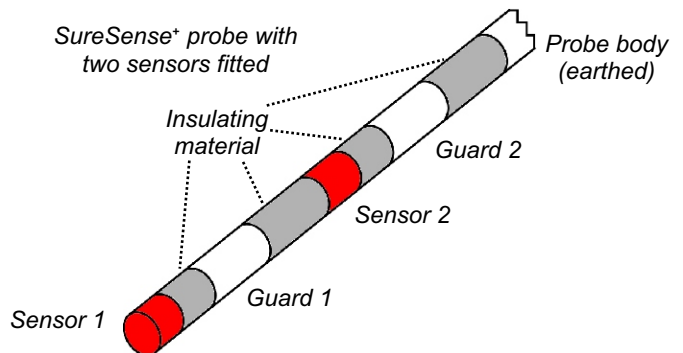



# WHY USE FOAM MEASUREMENT TECHNOLOGY?

## WHAT CAUSES FOAM?

Foam arises in many industries, and can have a complex set of causes. For example, it can be produced biologically (as in anaerobic digestion or brewing), through the cleansing of wastewater, or as a result of cleaning starchy vegetables. It can be an essential part of the production process, or an unwanted side-effect.

## WHY MEASURE AND CONTROL FOAM?

- ◆ Reduce waste and product loss through over-foam events
- ◆ Increase productivity and batch yields
- ◆ Reduce volume of anti-foam and de-foamer used
- ◆ Minimise clean-up costs and downtime caused by spills
- ◆ Reduce costs through waste elimination
- ◆ Improve process control and efficiency
- ◆ Prevent environmental pollution
- ◆ Isolate potential contaminants
- ◆ Prevent damage to valuable process equipment

## APPLICATIONS IN MANY INDUSTRIES

- ◆ Pharmaceutical
- ◆ Water and wastewater treatment
- ◆ Brewing and beverage
- ◆ Biotechnology
- ◆ Food and dairy
- ◆ Chemical
- ◆ Paint
- ◆ Anaerobic digestion (AD) and waste

## UNIQUE, PURPOSE-DESIGNED TECHNOLOGY

Hycontrol's purpose-designed foam measuring and control systems utilise patented sensing technology and have been proven in a wide range of applications. This technology was developed through research within the petrochemical sector, however, it was soon realised that it could offer benefits to a diverse range of other industries.


By comparison, alternative, less effective solutions use existing level measuring technology that has been 'adapted' to measure foam, which is unreliable, inaccurate and adversely affected by product build-up on the probes. **Hycontrol foam sensors, on the other hand, are designed purely for foam measurement.**

## MANUFACTURED TO ISO9001 Q.M.S.



*The standard of all Hycontrol products is strictly monitored to conform to all ISO quality requirements.*

*This ensures we meet the needs of customers as well as statutory and regulatory requirements.*

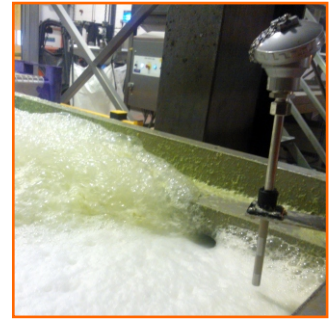

### GREATER CONTROL

*Foam is inherently unpredictable. It is possible to control, reduce, or remove its production.*



### REDUCE COSTS

*Considerable savings can be achieved by actively controlling and reducing the use of anti-foam.*



### PREVENT POLLUTION

*Reduce risk of excess foaming and overflows, protecting the environment from pollution.*



### INCREASE YIELDS

*Taking control of foam will improve process efficiency, reduce product loss and increase batch yields.*